


INNOTECH DRAWER ASSEMBLY


ASSEMBLY TIPS

- Always assemble on a flat surface to ensure drawer is square
- 5mm 'Euro' screws supplied for fixing runners into carcass
- Short screws supplied for assembling drawer box

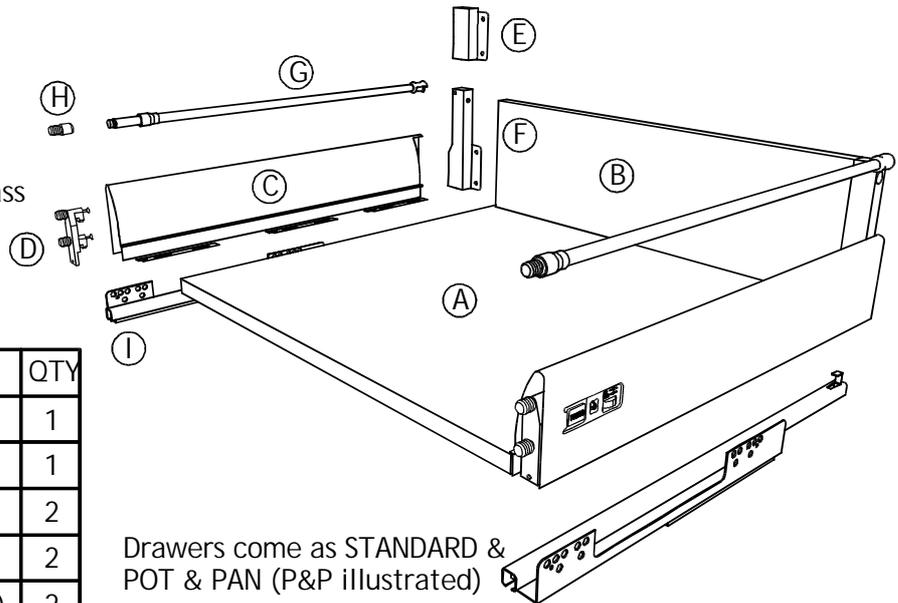


Drawers come as STANDARD & POT & PAN (P&P illustrated)

NOM	DESCRIPTION	QTY
(A)	BASE (with carcass)	1
(B)	BACK (with carcass)	1
(C)	METAL SIDES (L & R)	2
(D)	FRONT CONNECTOR	2
(E)	BACK CONNECTOR (L & R) (standard only)	2
(F)	BACK CONNECTOR (L & R) (pot & pan only)	2
(G)	GALLERY RAIL (p & p only)	2
(H)	GALLERY RAIL CONNECTOR (pot & pan only)	1
(I)	RUNNERS (L & R)	2

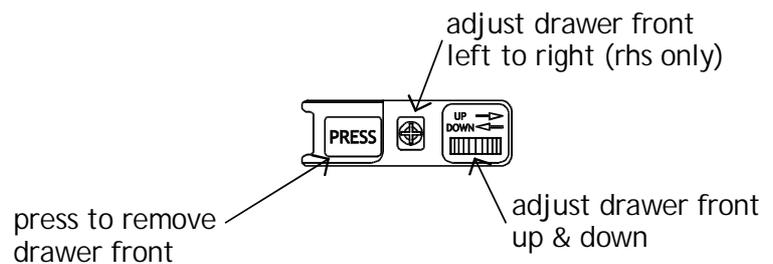

DRAWER ADJUSTMENT

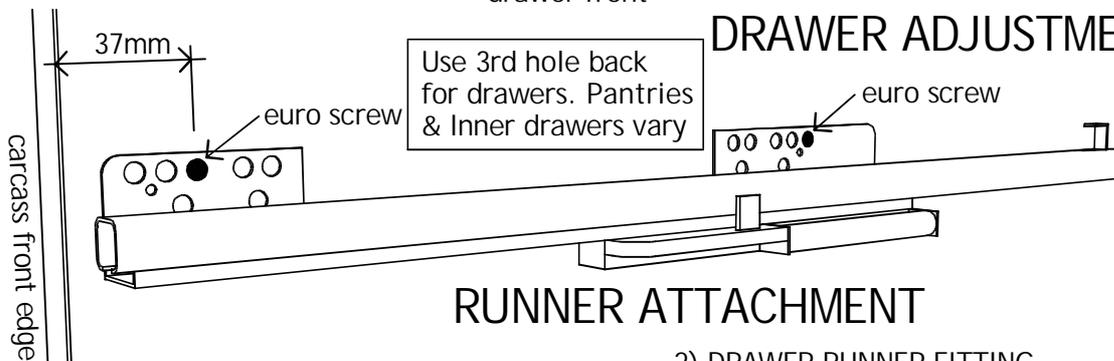

RUNNER ATTACHMENT

ORDER OF ASSEMBLY

1) DRAWER ASSEMBLY

- Attach BACK CONNECTORS to METAL SIDES
- Screw BASE to METAL SIDES from underneath using Short Screws
- Screw BACK between BACK CONNECTORS
- Clip GALLERY RAILS to BACK CONNECTORS (Pot & Pan drawers only)

2) DRAWER RUNNER FITTING

- Attach RUNNER to the inside of the carcass using Euro screws


- Sit assembled drawer on top of runners and push all the way in until it clicks in place

3) DRAWER FRONT ATTACHMENT

- Attach FRONT CONNECTORS to Drawer Front
- Connect Drawer Front to Assembled Drawer which will click in place






HEAT DEFLECTOR

Heat deflectors are designed to deflect heat away from vacuum formed & other types of doors. EZIKIT recommends that they are installed alongside ovens which do not have inbuilt deflector surrounds.

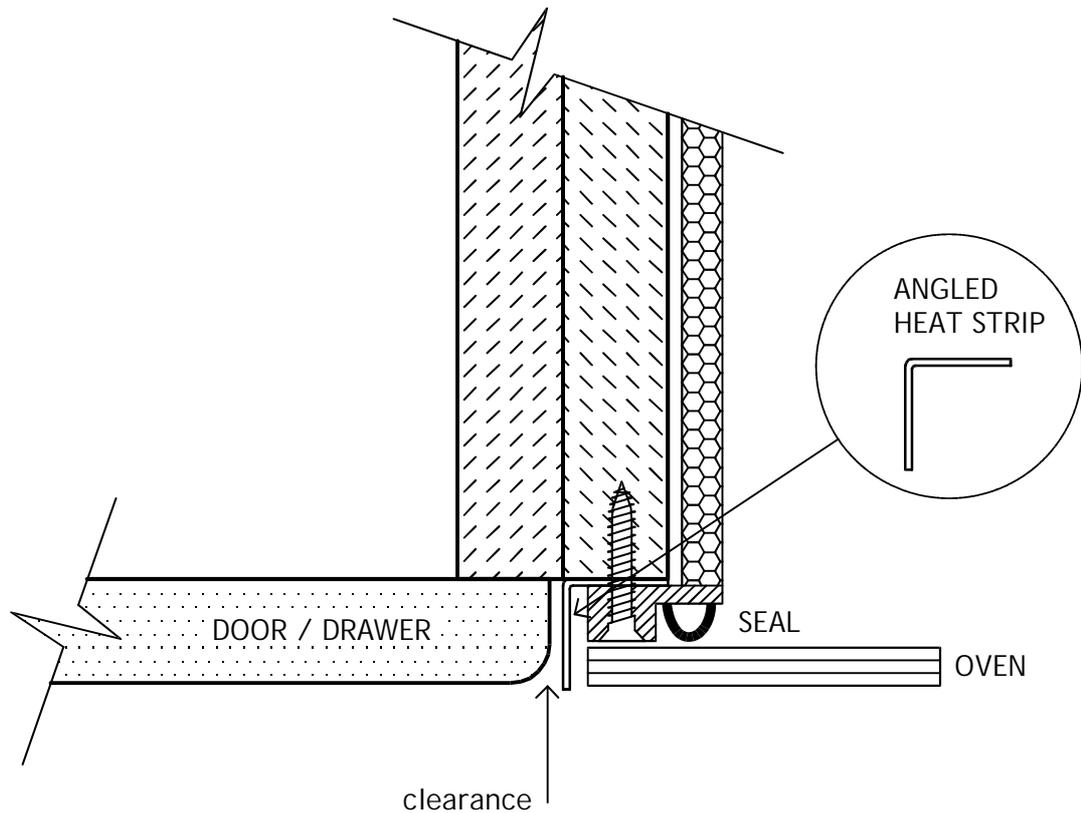


Please note that if heat deflectors are not used where recommended, the warranty will be void.

HINGE DETAILS

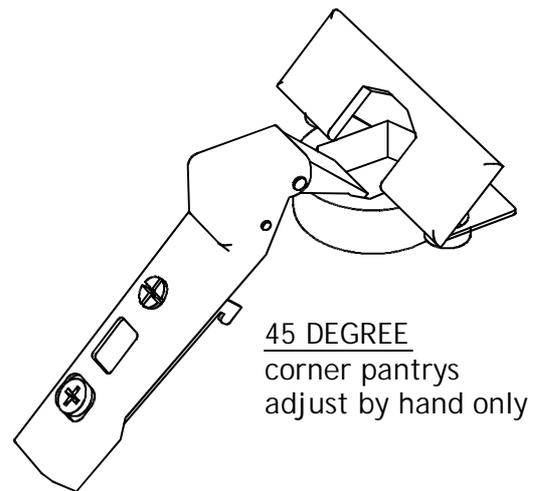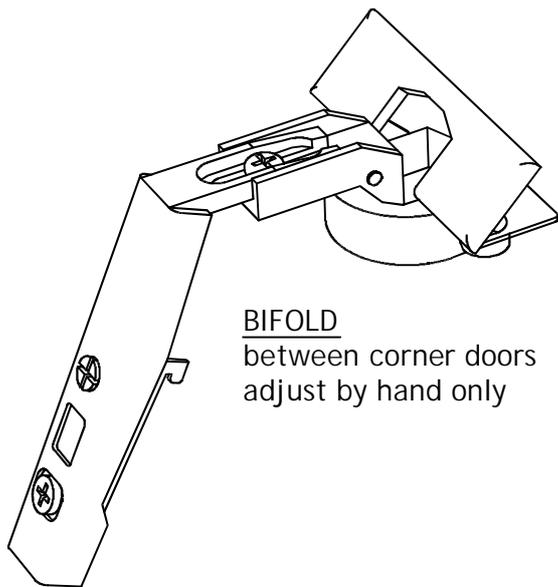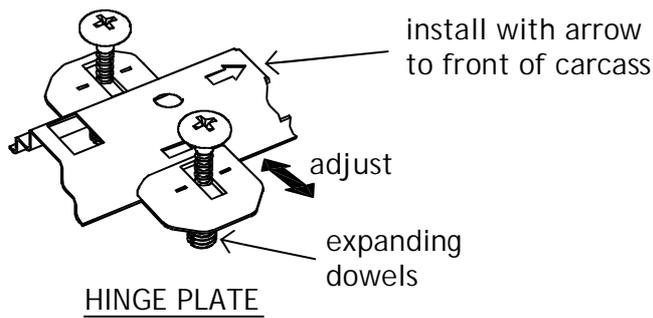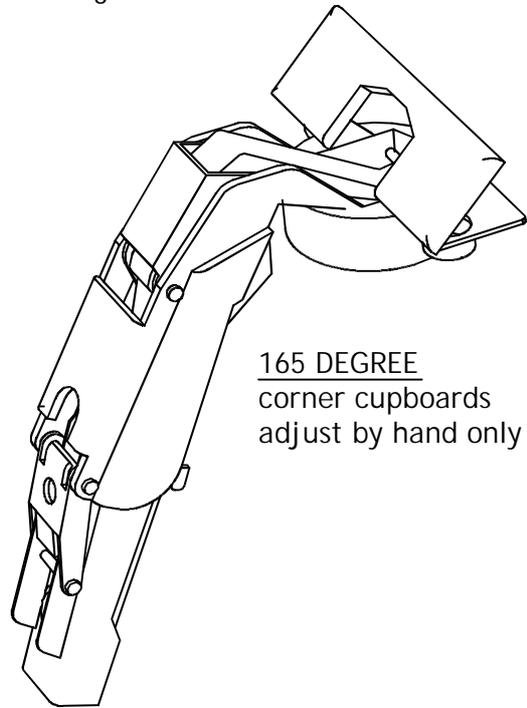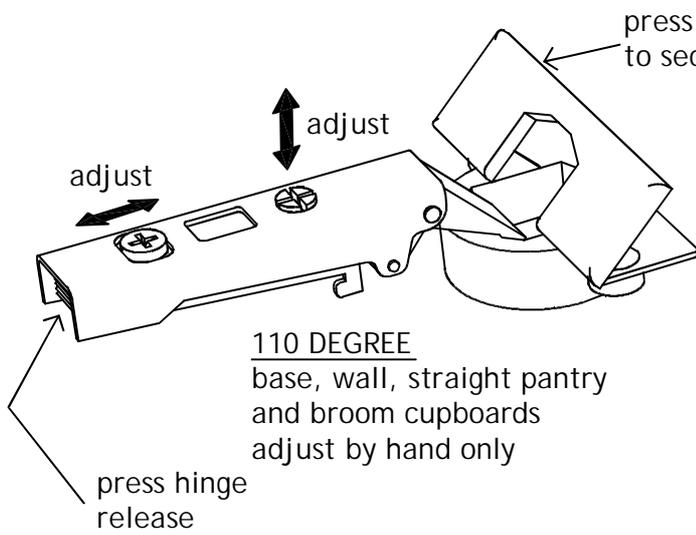

DAISY CATCH

Daisy catches are designed to hold a corner door in place and relieve the hinge from any weight from the door when in the closed position. They are not absolutely necessary, but can assist in the final adjustment of the door.

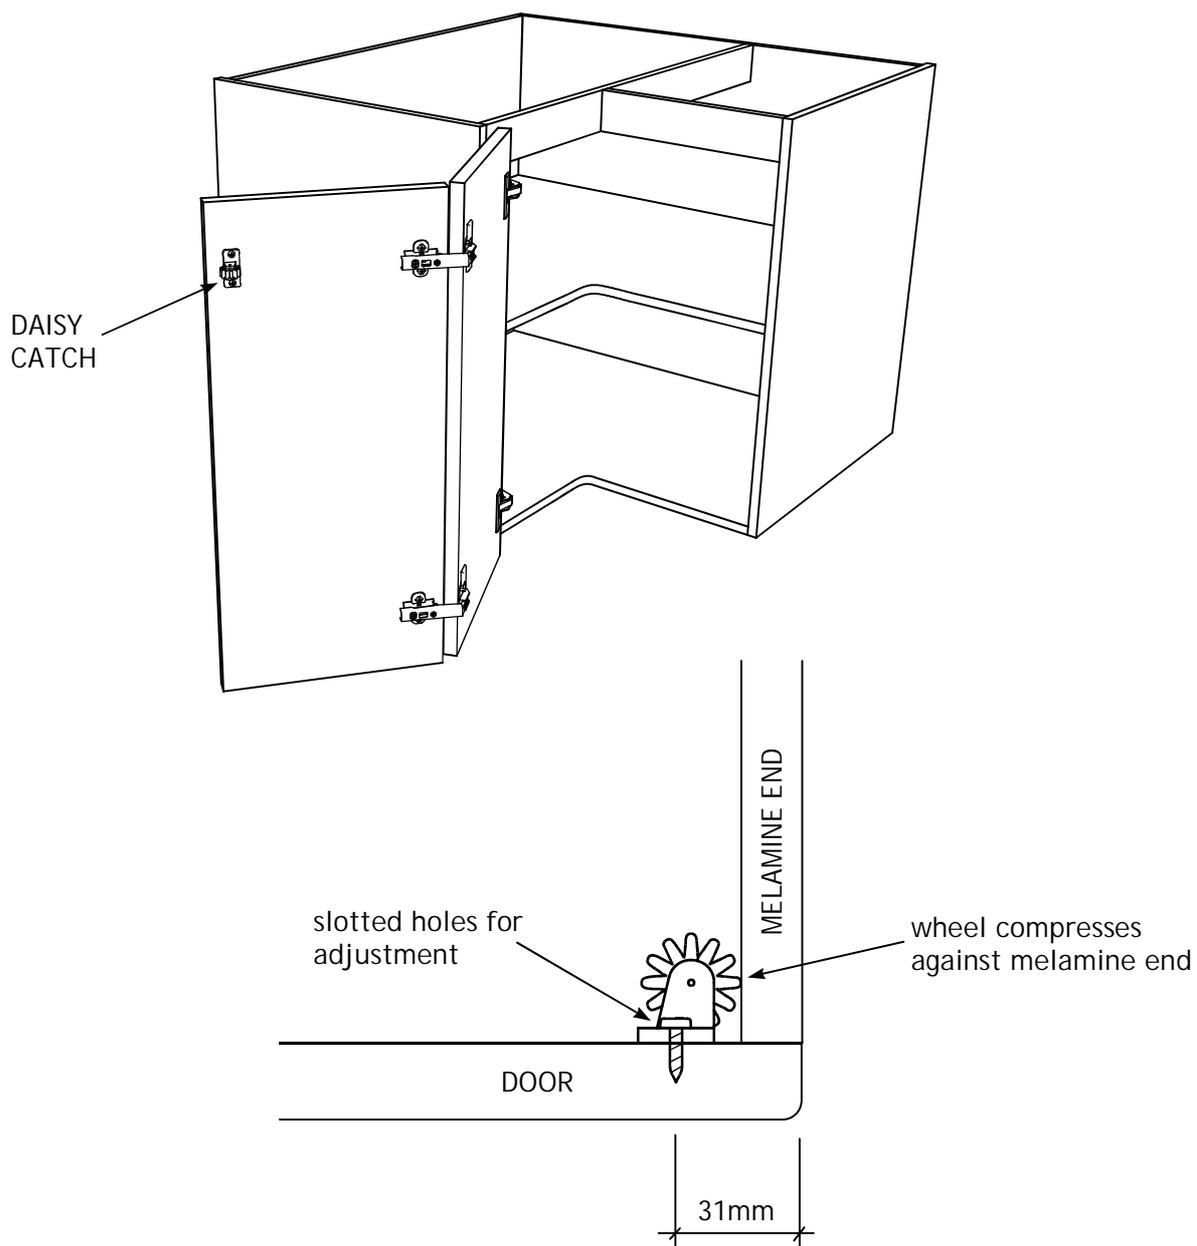

SCREWS & FIXINGS



"CUPBOARD/PANEL"
6G 25mm SCREW
 carcass to carcass
 carcass to panels



"LEGS"
8G 32mm SCREW
 adjustable legs



"ASSEMBLY"
8G 45mm SCREW
 carcass assembly
 self countersinking



"WALL"
8G 50mm SCREW *

* wall fixing screws
 suitable for studwork
 for masonry additional
 fixings will be required


NOTE: Screws are bagged & labelled
 according to their specific purpose.




"EURO"
5mm EURO SCREW
 drawer runners
 std drawer assembly



"DRAWER"
15mm SCREW
 214 drawer front stabiliser
 soft close drawer assembly
 angle brackets




SHELVING PINS
 for adjustable shelves



'BISCUIT' or 'LAMELLO'
 for concealed fixings

BENCHTOP ASSEMBLY

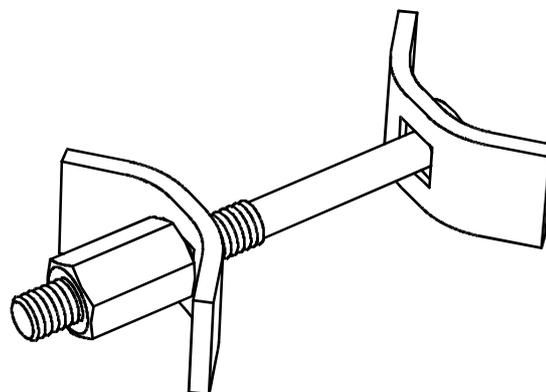

BENCHTOP CONNECTOR
 use spanner to tighten

ADJUSTABLE LEGS

